




GALUCHO







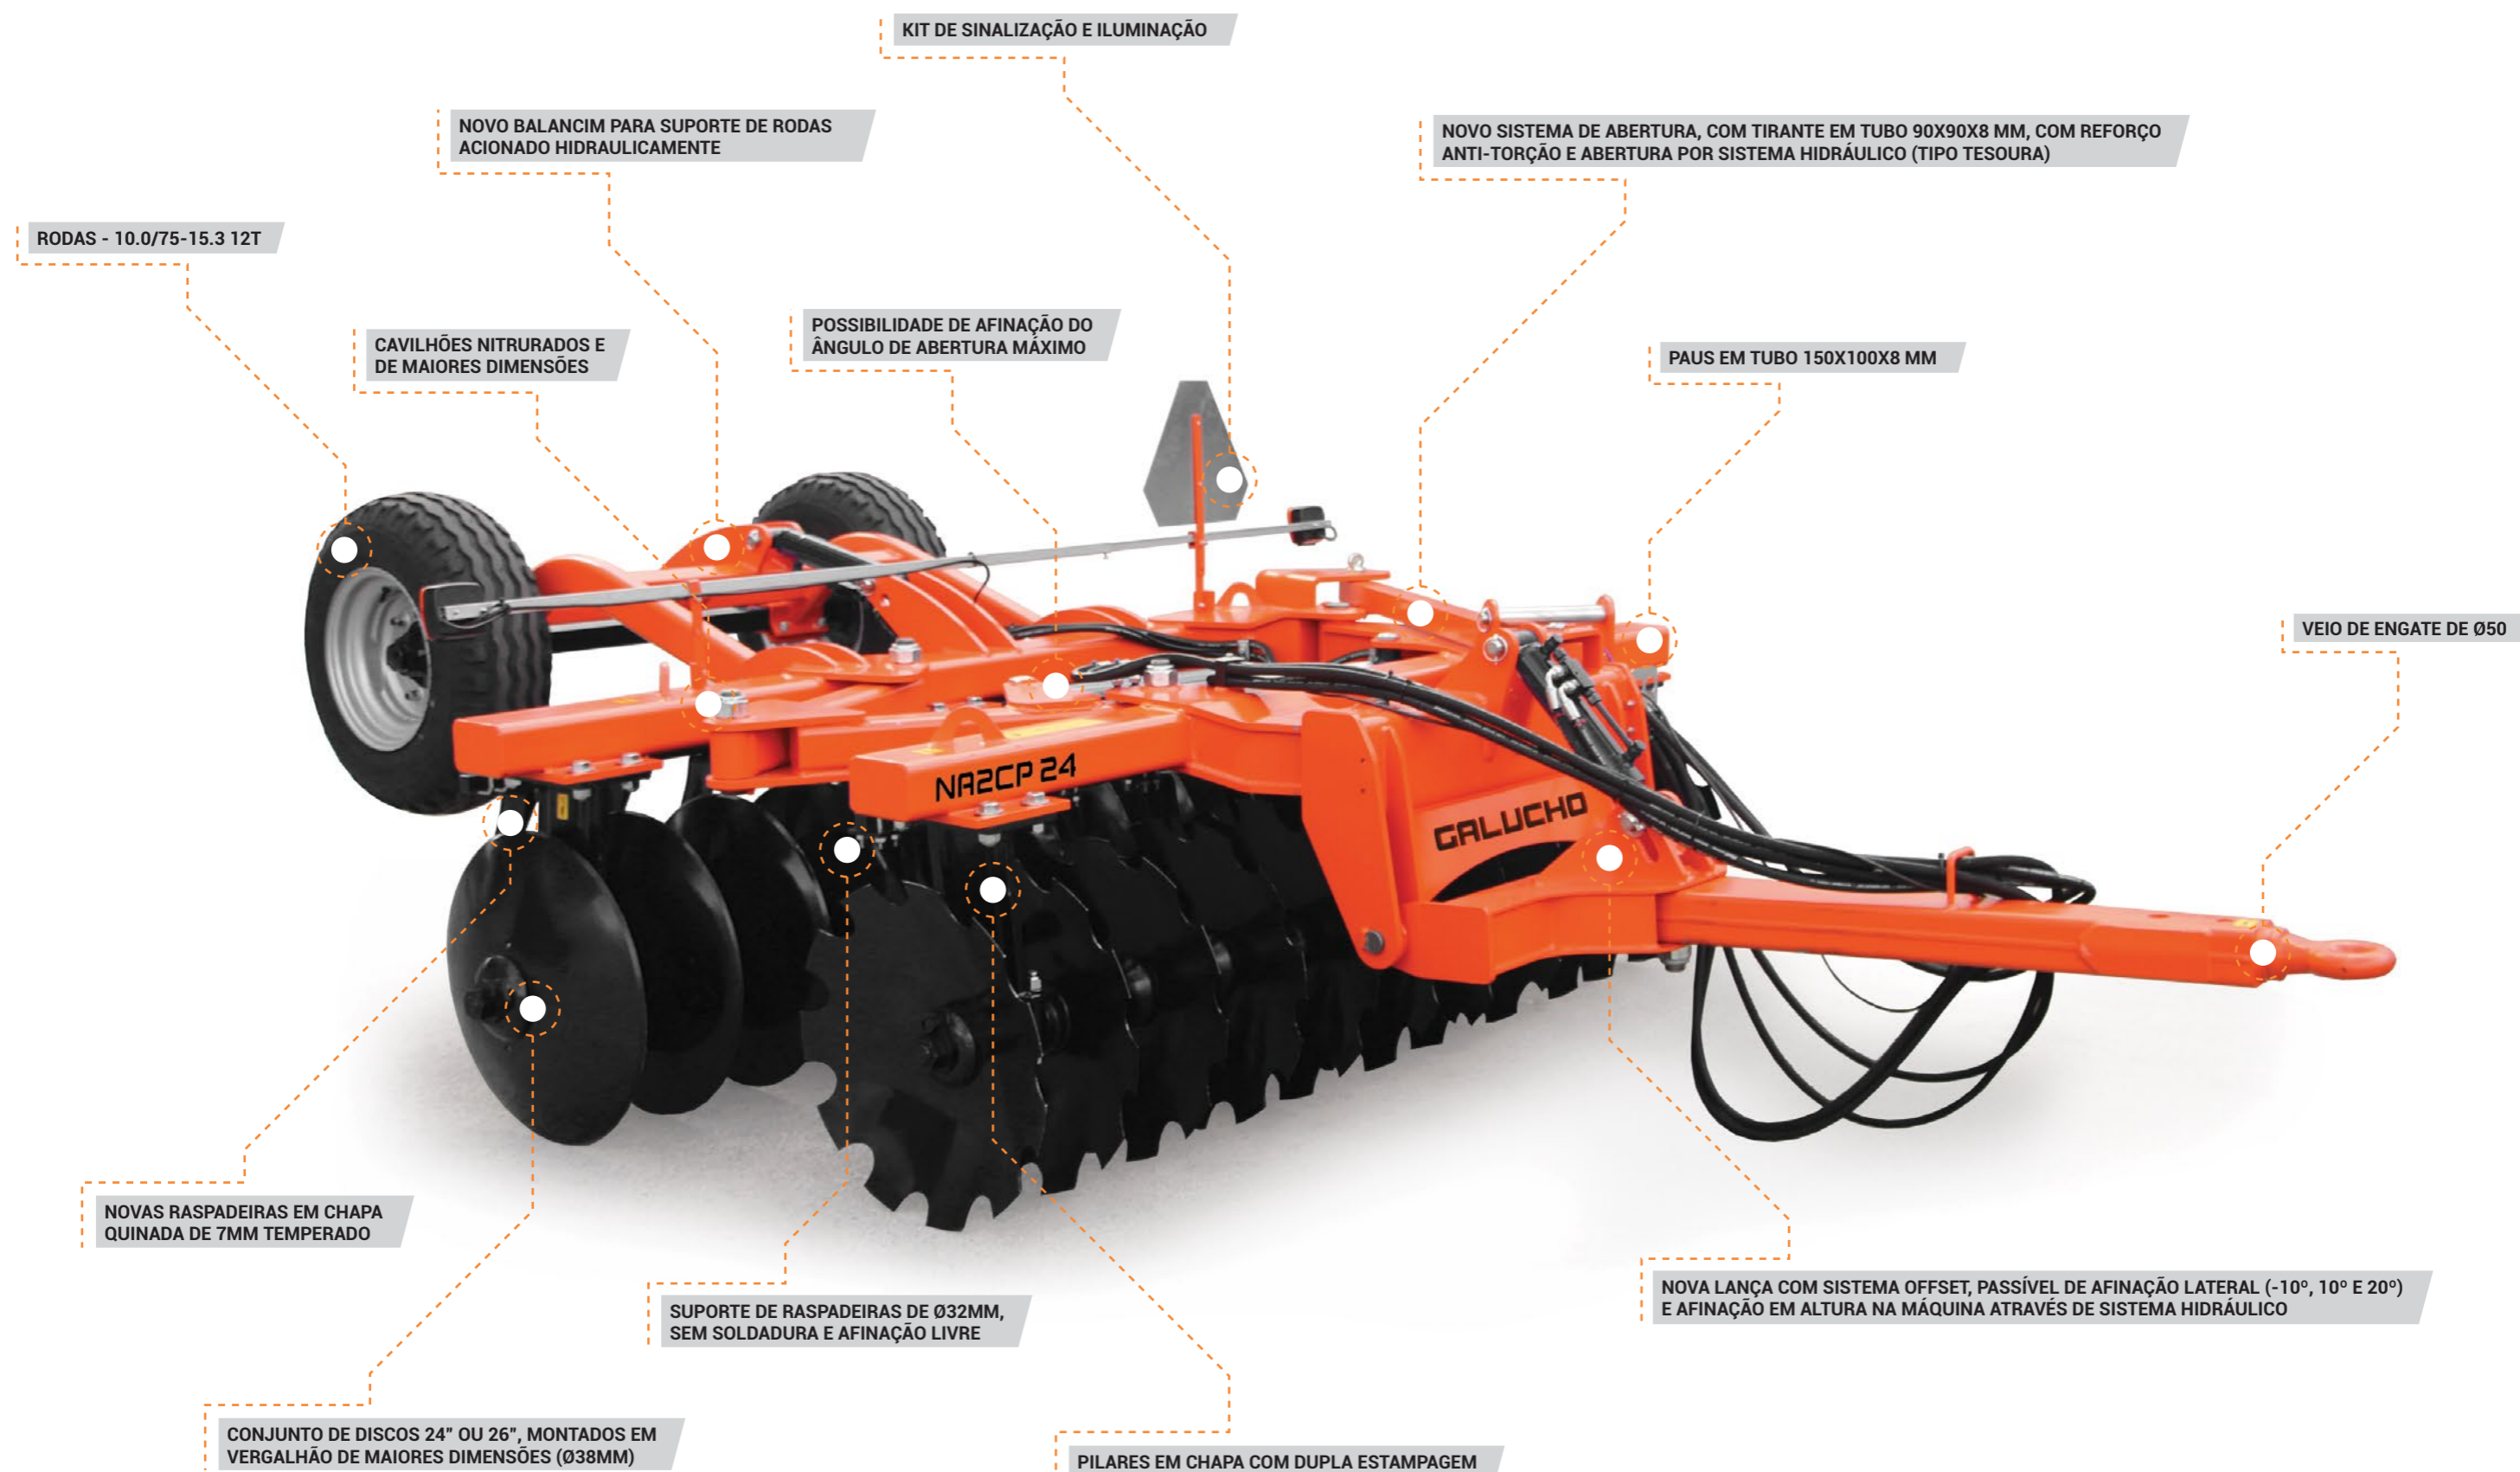



NA2CP / GRADES DE DISCOS REBOCADAS,
OFFSET OU "V" E ABERTURA HIDRÁULICA
RODAS ACIONADAS HIDRAULICAMENTE

ESPECIFICAÇÕES



CARATERÍSTICAS TÉCNICAS

								
		NÚMERO	DIÂM. x ESP. (") - (mm)	Nº	m	m	KG	Cv
221010000	NA2CP-18-26 DRF	18	26" - 660	6 (3+3)	2,05	2,25	1625	90-120
221020000	NA2CP-20-24 DRF	20	24" - 610	6 (3+3)	2,26	2,48	1620	90-110
221030000	NA2CP-20-26 DRF	20	26" - 660	6 (3+3)	2,26	2,48	1740	100-130
221040000	NA2CP-22-24 DRF	22	24" - 610	6 (3+3)	2,46	2,70	1730	100-120
221050000	NA2CP-22-26 DRF	22	26" - 660	6 (3+3)	2,46	2,70	1850	110-140
221060000	NA2CP-24-24 DRF	24	24" - 610	8 (4+4)	2,70	2,93	1880	110-130
221070000	NA2CP-24-26 DRF	24	26" - 660	8 (4+4)	2,70	2,93	2020	120-150

EQUIPAMENTO OPCIONAL

221004000 Kit hidráulico por eletroválvula


221003000 Kit disco apagador p/ 24"

221831000 Kit fixação do veio de engate


221003200 Kit disco apagador p/ 26"



GALUCHO

 GALUCHO - Indústrias Metalomecânicas, S.A.
Avenida Central, Nº4 | 2705-737 São João das Lampas | Sintra - Portugal

 geral@galucho.pt

 (+351) 219 608 500

 www.galucho.pt

