


TECHNICAL FEATURES

Model	Dimensions	Nº of Stowages	Tare*	Axles	Wheels	MPLW** (Gross weight)
Skeleto 41t	12,80 m x 2,54 m	4	5660 kg	9t	385/65R22.5	41 t
Skeleto 41t with floor	12,80 m x 2,54 m	4	7060 kg	9t	385/65R22.5	41 t
Skeleto 46t	12,80 m x 2,54 m	4	5860 kg	10t	425/65R22.5	46 t
Skeleto 46t with floor	12,80 m x 2,54 m	4	7260 kg	10t	425/65R22.5	46 t
Skeleto 54t	13,60 m x 2,54 m	5	6700 kg	12t	445/65R22.5	54 t
Skeleto 54t with floor	13,60 m x 2,54 m	5	8100 kg	12t	445/65R22.5	54 t

*The tare value varies depending on the choice of optional equipment

**MPLW: Maximum permissible laden weight

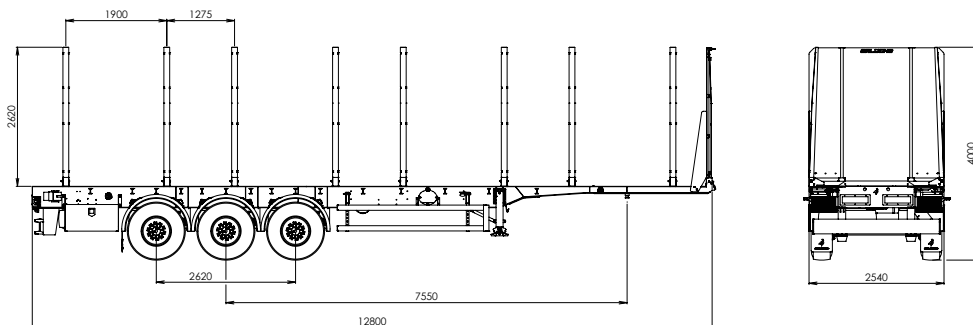

OPTIONAL EQUIPMENT

- Loading manometer
- Smartboard
- Side net basket
- 2nd lifting axle
- Olive leaf sheet flooring on the entire loading surface
- Fire extinguisher box

MAIN ADVANTAGES

- Up to 20% reduction in fuel consumption
- Reduced tare
- Greater load capacity
- Approved stakes

GALUCHO

NOVELTY



GALUCHO
SKELETO

TIMBER SEMITRAILER "SKELETAL" WITH 3 AXLES

GALUCHO

GALUCHO - Indústrias Metalomecânicas, S.A.
Avenida Central, Nª4 | 2705-737 São João das Lampas | Sintra - Portugal

geral@galucho.pt
(+351) 219 608 500
www.galucho.pt



Engravings and technical data are for guidance only, subject to change without notice.

STANDARD FEATURES



16 OXCART STAKES (4 STOWAGE)

PNEUMATIC 3-AXLE SUSPENSION SAF 9T

30 LITRE WATER TANK

1ST LIFTING AXLE

EBS 2S-2M

7 WHEELS 385/65 R22.5
(W/ 1 SPARE WHEEL)

PLASTIC TOOLBOX

2 WHEEL CHOCKS

SPARE WHEEL HOLDER